
ARROW
EXHAUST

NOTA TECNICA / TECHNICAL NOTICE

HONDA CRF 1100 L Africa Twin

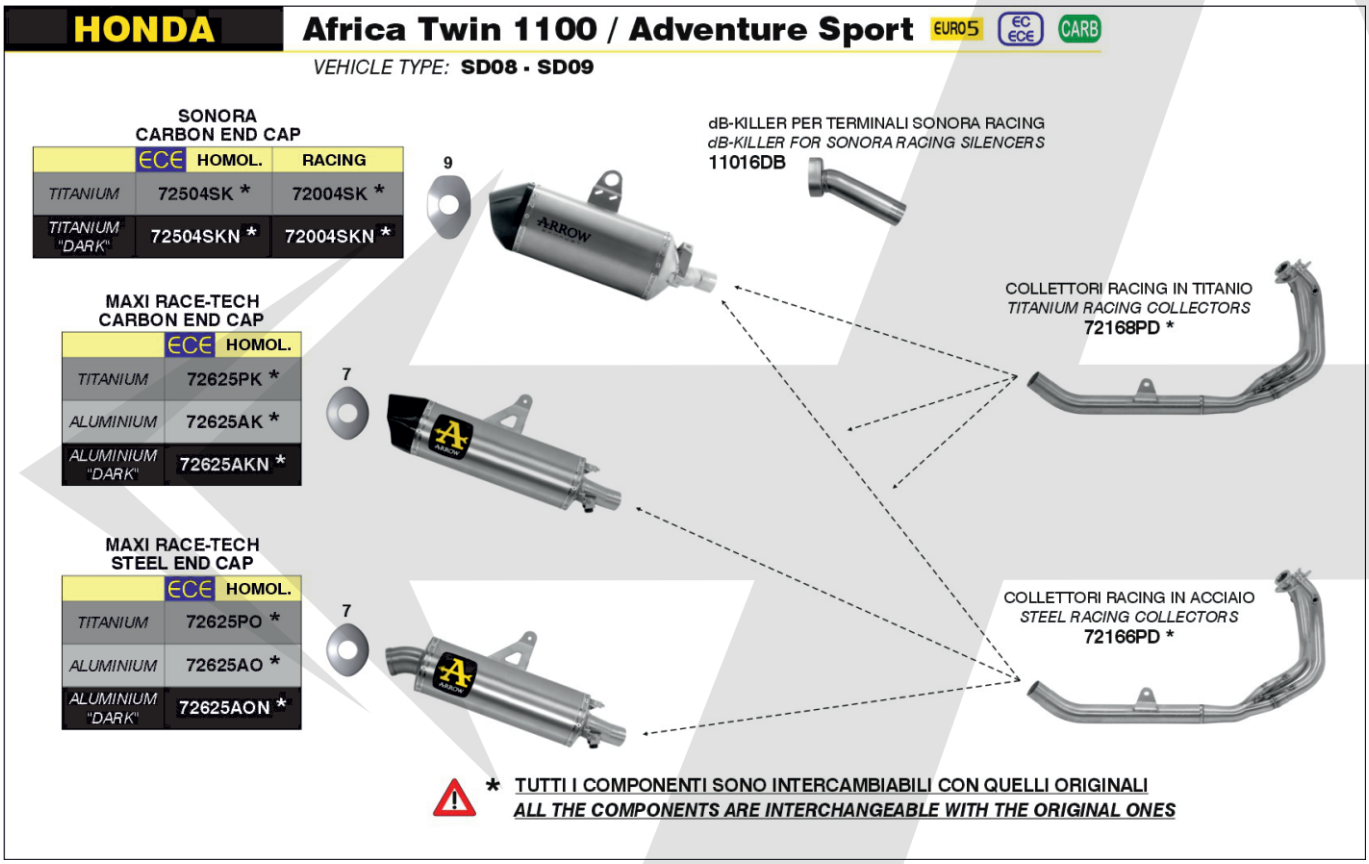

IT VALVOLA ALLO SCARICO

Lo scarico originale Honda è dotato di valvola allo scarico, montata sul silenziatore originale. L'installazione di uno dei silenziatori Arrow realizzati per CRF1100L richiede la rimozione della valvola allo scarico. Il sistema di diagnostica di bordo (EOBD) segnala il mancato funzionamento della valvola mediante un segnale di errore sul display e la centralina può entrare in modalità "protezione". Installando quindi uno dei silenziatori Arrow è fortemente consigliata la rimappatura mediante una mappa centralina che escluda la funzione valvola o, in alternativa, l'installazione di un emulatore valvola elettronico tra quelli disponibili sul mercato.

EN EXHAUST VALVE SYSTEM

Honda original equipment exhaust system fits an exhaust valve, placed on OE silencer. Installing any Arrow silencers available for CRF1100L requires the removal of the exhaust valve. On-board diagnostic system (EOBD) will display a warning message due to the exhaust valve malfunction and ECU can enter "recovery mode". Therefore, when installing any Arrow silencers it is strongly recommended to remap ECU with a map de-activating exhaust valve function or, as an alternative, to install an exhaust valve emulator system, available in the market.